

### Description:

The disposable heel grounder is ideal for outfitting visitors in ESD controlled areas. An aluminum strip clips onto the shoe to make contact with the wearer. The conductive non-woven nylon strip is held to the heel of the shoe by pressure sensitive adhesive.


### Electrical Performance:

1. The tab to cup resistance:  $10^4 - 10^5$  ohms
2. Decay time: <0.01 second (FTMS 101C, Method 4046C)

### To Attach:

1. Strip release paper from pressure sensitive adhesive.
2. Fold and clip aluminum strip to top of shoe (over sock and sock).
3. Pull strap snugly down and under heel.
4. Step firmly onto pressure-sensitive adhesive material at serration.
5. Check for proper ground connection with Combination Wrist Strap/Footwear Test.
6. One heel grounder should be used on each shoe.

ITEM NO.	DESCRIPTION	LENGTH	PKG.
24165	Foot Ground, Heel, Disposable	12"	100

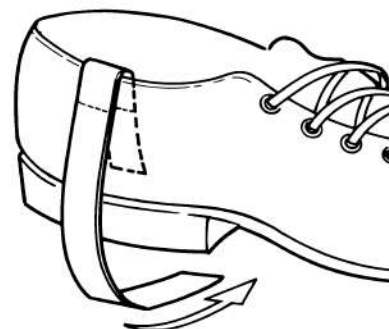

Refer to Tech Brief PS-2035 for comparison of all ESD Systems.com foot grounders

### Foot Grounder, Heel, Disposable



ESD SYSTEMS.COM  
19 BRIGHAM STREET UNIT 9  
MARLBORO, MA 01752 USA  
TEL: (508) 485-7390 FAX (508) 480-0257



Visit our online  
library of Tech Drawings:  
<http://www.esdsystems.com>